

P42HHS10

42" color plasma display monitor

# Plasmavision™ W

Award winning technology puts you in the picture.

Fujitsu General Limited is proud to present the new 42" plasma display monitor, which introduces the new AVM(Advanced Video Movement) Plus Full Digital Video Processor. Fujitsu General Limited's exclusive AVM Plus features enhanced video quality, better original picture reproduction and jagged edge removal and has again raised the market standard for picture quality. The P42HHS10 has a brand new cabinet design and a Selector Unit\* , which is connected by just one cable in order to facilitate easier cable management and flexibility in installation. The Selector Unit\* is equipped with various analog and digital inputs to meet today's, and tomorrow's home theater requirements.

We have incorporated our industry leading technology, ALIS (Alternate Lighting of Surfaces) Method, into the plasma panel creating incredibly high brightness and high definition. Combining the "Fine Mode" feature, which enables you to create cinema quality pictures with a touch of a button, with the built-in full digital audio processor , you can easily experience the image and sound quality of a movie theater in your own home.



EMMY® AWARD WINNER 2002  
©NATAS/ATAS  
Scientific Development and Technological Achievement Emmy Awards Oct.2002

## Specifications

<b>P42HHS10</b>		
<b>POWER SOURCE</b>	110 TO 240V AC, 50HZ/60HZ	
<b>POWER CONSUMPTION</b>	4.3A(110V AC) / 1.8A(240V AC)	
<b>DISPLAY PANEL</b>	TYPE	AC TYPE PLASMA DISPLAY PANEL
	SCREEN SIZE	922(H) X 522(V) mm DIAGONAL 42 INCHES
	ASPECT RATIO	16:9
	NUMBER OF PIXELS	1,024(H/RGB TRIO) X 1,024(V) PIXELS
	PIXEL PITCH	0.90mm X 0.51mm
	DISPLAYABLE COLORS	16.77 MILLION COLORS
	VIEWING ANGLE	MINIMUM 160 DEGREES(HORIZONTAL AND VERTICAL)
<b>COLOR SYSTEM</b>	3.58NTSC, 4.43NTSC, PAL, PAL60, PAL-M, PAL-N, SECAM	
<b>DIMENSIONS</b>	1,037(W) X 642(H) X 85(D) mm	
<b>WEIGHT</b>	28.5KGS	
<b>OPERATING CONDITIONS</b>	TEMPERATURE	0°C - 40°C
	RELATIVE HUMIDITY	20% - 80%(NOT CONDENSING)
<b>REGULATIONS</b>	SAFETY : UL6500, (C-JUL), EN60065, IEC60065	
	EMC : FCC CLASS B, EN55022, CISPR22	
<b>BEZEL COLOR</b>	SILVER	

<b>P-SU4H10</b>		
<b>POWER SOURCE</b>	110 TO 240V AC, 50HZ/60HZ	
<b>POWER CONSUMPTION</b>	0.4A	
<b>DIMENSIONS</b>	430(W) X 95(H) X 370(D) mm	
<b>WEIGHT</b>	4.5KGS	
<b>REGULATIONS</b>	SAFETY : UL6500, (C-JUL), EN60065, IEC60065	
	EMC : FCC CLASS B, EN55022, CISPR22	

\*PLEASE NOTE: THE P42HHS10E DOES NOT COME WITH THE SELECTOR UNIT. VIDEO CONNECTIONS AND FUNCTIONALITY ARE ONLY AVAILABLE IF THE OPTIONAL SELECTOR UNIT P-SU4H10E IS ORDERED AND CONNECTED.

- ATTENTION : DO NOT DISPLAY THE SAME PICTURE(PATTERN) FOR A LONG PERIOD OF TIME. THIS MAY CAUSE AFTER IMAGES.
- THE PLASMA PANEL HAS BEEN BUILT USING EXTREMELY PRECISE AND SOPHISTICATED TECHNOLOGY; MORE THAN 99.99% OF ITS PIXELS ARE EFFECTIVE. HOWEVER, A MINUTE NUMBER OF PIXELS ARE MISSING OR CONSTANTLY LIT.
- PLASMAVISION™ IS A WORLDWIDE TRADEMARK OF FUJITSU GENERAL LIMITED AND IS A REGISTERED TRADEMARK IN JAPAN, USA AND OTHER COUNTRIES OR AREAS.
- SPECIFICATIONS AND DESIGN ARE SUBJECT TO CHANGE WITHOUT ANY NOTICE FOR FURTHER IMPROVEMENT.


## INPUT/OUTPUT

<b>P42HHS10</b>	
<b>RGB INPUT</b>	DVI X 1 SET
<b>AUDIO INPUT</b>	OPTICAL DIGITAL CONNECTOR X 1 SET
<b>AUDIO OUTPUT</b>	EXTERNAL SPEAKER TERMINAL(10W+10W, 6Ω)

<b>P-SU4H10W (INCLUDED WITH P42HHS10W/A)</b>	
<b>RGB INPUT 1</b>	DVI-D(HDCP) X 1 SET
<b>RGB INPUT 2</b>	mDsub 15 PIN(3 ROW TYPE : MALE) X 1 SET
<b>RGB INPUT 3</b>	mDsub 15 PIN(3 ROW TYPE : MALE) X 1 SET
<b>VIDEO INPUT</b>	RCA-PIN CONNECTOR X 4 SETS
<b>S-VIDEO INPUT</b>	S-TERMINAL X 4 SETS
<b>COMPONENT VIDEO INPUT</b>	RCA-PIN CONNECTOR X 5 SETS
<b>AUDIO INPUT</b>	RCA-PIN X 6 SETS(L/R)
	STEREO MINI JACK X 2 SETS
	OPTICAL DIGITAL CONNECTOR X 2 SETS
<b>AUDIO OUTPUT</b>	RCA PIN X 1 SET(L/R)
	OPTICAL DIGITAL CONNECTOR X 2 SETS
<b>RGB OUTPUT</b>	DVI X 1 SET

<b>P-SU4H10E (OPTION FOR P42HHS10E)</b>	
<b>RGB INPUT 1</b>	DVI-D(HDCP) X 1 SET
<b>RGB INPUT 2</b>	mDsub 15 PIN(3 ROW TYPE : MALE) X 1 SET
<b>RGB INPUT 3</b>	mDsub 15 PIN(3 ROW TYPE : MALE) X 1 SET
<b>VIDEO INPUT</b>	RCA-PIN CONNECTOR X 1 SET
<b>S-VIDEO INPUT</b>	S-TERMINAL X 1 SET
<b>COMPONENT VIDEO INPUT</b>	RCA-PIN CONNECTOR X 2 SETS
<b>SCART INPUT</b>	SCART TERMINAL X 3 SETS(VIDEO/S-VIDEO/RGB SELECTABLE)
<b>AUDIO INPUT</b>	RCA-PIN X 3 SETS(L/R)
	STEREO MINI JACK X 2 SETS
	OPTICAL DIGITAL CONNECTOR X 2 SETS
<b>AUDIO OUTPUT</b>	RCA PIN X 1 SET(L/R)
	OPTICAL DIGITAL CONNECTOR X 2 SETS
<b>RGB OUTPUT</b>	DVI X 1 SET

## Dimensions

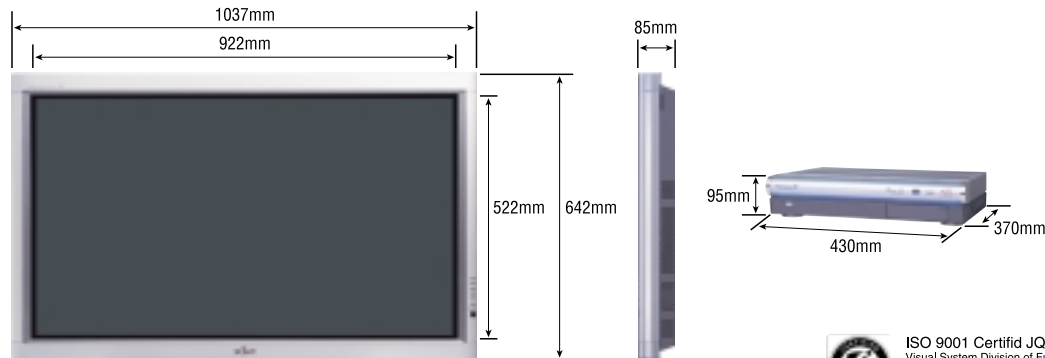

OPTIONS	
DESKTOP STAND(S COLOR)	P-TT4200-S
WALL MOUNTING BRACKET	P-WB4200-B
CEILING MOUNT BRACKET	P-CT4200-B
SPEAKER	P-SP4200-S
SPEAKER STAND	P-ST4200-S
SELECTOR UNIT	P-SU4H10E
<b>*ALSO AVAILABLE USING OPTIONAL ADAPTOR(P-AD4200-B)</b>	
WALL MOUNTING BRACKET	P-42WB12-B
CEILING MOUNT BRACKET	P-42CT11-B



ISO 9001 Certified JQA-2722  
Visual System Division of Fujitsu General Ltd.  
This product has been certified to comply with the international Organization for Standardization's ISO 9001 standard for quality assurance.



IACO-EC99J1163  
Fujitsu General(Kawasaki Head Quarters)  
has received ISO 14001 certification  
for its environmental  
management systems.

## FUJITSU GENERAL LIMITED

1116, Suenaga, Takatsu-ku, Kawasaki 213-8502, Japan  
<http://www.fujitsugeneral.co.jp>  
AT784 Printed in Japan 211©

**Distributed by:**