

P42HCA30

42" colour plasma display monitor



Award-winning technology, working for you

When delivering an important message, the picture quality* is critical. Fujitsu General Limited is proud to present the new P42HCA30 plasma display monitor designed specifically for commercial applications. The P42HCA30 is equipped with our industry-leading technology, Fujitsu General Limited's exclusive AVM (Advanced Video Movement) Full Digital Video Processor, and has incredibly high brightness and high definition by incorporating the ALIS (Alternate Lighting of Surfaces) method. This makes the new P42HCA30 perfect for business presentations, public displays and trade shows where important messages need to get through clearly.



FUJITSU

For a world without limits.

P42HCA30



specifications


POWER SOURCE	110 TO 240 AC, 50HZ/60HZ	
POWER CONSUMPTION	4.3-1.8A(P42HCA10, P42HCA12), 4.4-1.9A (P42HCA11)	
DISPLAY PANEL	TYPE	AC TYPE PLASMA DISPLAY PANEL
	SCREEN SIZE	922(H) x 522 (V) mm DIAGONAL 42 INCHES
	ASPECT RATIO	16:9
	NUMBER OF PIXELS	1,024(H/RGB TRIO) X 1,024(V) PIXELS
	PIXEL PITCH	0.90mm x 0.51 mm
	DISPLAYABLE COLOURS	1.07 BILLION
	VIEWING ANGLE	MINIMUM 160 DEGREES (HORIZONTAL AND VERTICAL)
RGB INPUT	RGB INPUT 1	mDsub 15 PIN (3-ROW TYPE; MALE) X 1 SET
	RGB INPUT 2	BNC CONNECTOR X 1 SET
CONTROL	RS-232C	Dsub 9PIN (2 ROW TYPE)
DIMENSIONS	1,035(W) x 640(H) X 85*(D) mm *NOT INCLUDING PROJECTION PORTION	
WEIGHT	28.5KGS	
OPERATING CONDITIONS	TEMPERATURE	0°C - 40°C
	RELATIVE HUMIDITY	20% -80%(NOT CONDENSING)
REGULATIONS	UL6500, (C-UL), EN60065, IEC60065(SAFETY), FCC PART 15 CLASS A, IEC603 CLASS A, EN55022 CLASS A, CISPR22 CLASS A, AS/NZS3548(EMC), EN61000-3-2(HARMONIC CURRENTS EMISSIONS), EN61000-3-3(VOLTAGE FLUCTUATIONS AND FLICKER), EN55024(IMMUNITY)	
BEZEL COLOUR	GREY	

audio input/output

	P42HCA11
AUDIO INPUT	RCA-PIN X 3 SETS(L/R)
AUDIO OUTPUT	EXTERNAL SPEAKER TERMINAL (10W + 10W, 8Ω) INTERNAL SPEAKERS .

video input/output

P42HCA WITH OPTIONAL VIDEOBOARD P-TE1130	
VIDEO INPUT*	BNC CONNECTOR X 1 SET
S-VIDEO INPUT*	S-TERMINAL X 1 SET
COLOUR SYSTEM	3.58NTSC, 4.43NTSC, PAL, PAL60, SECAM

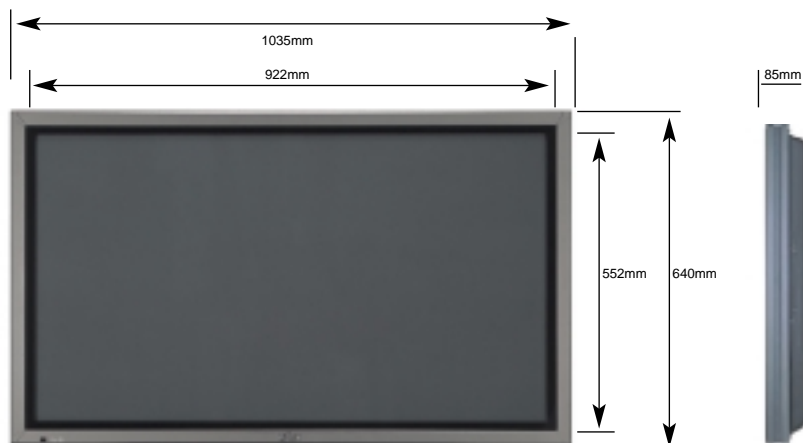

options

DESKTOP STAND(H COLOUR)	P-TT4200-H
WALL MOUNTING BRACKET	P-WB4200-B
CEILING MOUNT BRACKET	P-CT4200-B
SPEAKER	P-42SP11-H
SPEAKER STAND	P-42ST11-H
VIDEOBOARD	P-TE1130

***ALSO AVAILABLE USING OPTIONAL ADAPTOR (P-AD4200-B)**

WALL MOUNTING BRACKET	P42WB12-B
CEILING MOUNT BRACKET	P-42CT11-B

- ATTENTION : DO NOT DISPLAY THE SAME PICTURE (PATTERN) FOR A LONG PERIOD OF TIME. THIS MAY CAUSE AFTER-IMAGES.
- THE PLASMA PANEL HAS BEEN BUILT USING EXTREMELY PRECISE AND SOPHISTICATED TECHNOLOGY; MORE THAN 99.99% OF ITS PIXELS ARE EFFECTIVE. HOWEVER, A MINUTE NUMBER OF PIXELS ARE MISSING OR CONSTANTLY LIT.
- PLASMAVISION™ IS A WORLDWIDE TRADEMARK OF FUJITSU GENERAL LIMITED AND IS A REGISTERED TRADEMARK IN JAPAN, USA AND OTHER COUNTRIES OR AREAS.
- SPECIFICATIONS AND DESIGN ARE SUBJECT TO CHANGE WITHOUT ANY NOTICE FOR FURTHER IMPROVEMENT.

*PLEASE NOTE: THE P42HCA30 IS NOT EQUIPPED WITH VIDEO CONNECTORS. VIDEO CONNECTORS AND FUNCTIONALITY ARE ONLY AVAILABLE IF THE OPTIONAL VIDEOBOARD P-TE1130 IS ORDERED AND FITTED.

For a world without limits.