

# P50XCA30

50" colour plasma display monitor



## Award-winning technology, working for you

When delivering an important message, the picture quality\* is critical. Fujitsu General Limited is proud to present the new P50XCA30 plasma display monitor designed specifically for commercial applications. The P50XCA30 is equipped with our industry-leading technology, Fujitsu General Limited's exclusive AVM (Advanced Video Movement) Full Digital Video Processor, and has incredibly high brightness and high definition which make it perfect for business presentations, public displays and trade shows where important messages need to get through clearly.



**FUJITSU**

*For a world without limits.*

# P50XCA30



## specifications


<b>POWER SOURCE</b>	120V, 220 to 240V AC, 50HZ/60HZ	
<b>POWER CONSUMPTION</b>	U-TYPE (120V)	4.8A(P50XCA10, P50XCA12), 4.9A(P50XCA11)
	W/E/A-TYPE (220-240V)	2.6-1.9A(P50XCA10, P50XCA12), 2.7-2.0A(P50XCA11)
<b>DISPLAY PANEL</b>	TYPE	AC TYPE PLASMA DISPLAY PANEL
	SCREEN SIZE	1,106(H) x 622(V) mm DIAGONAL 50 INCHES
	ASPECT RATIO	16:9
	NUMBER OF PIXELS	1,366(H/RGB TRIO) X 768(V) PIXELS
	PIXEL PITCH	0.81 mm X 0.81mm
	DISPLAYABLE COLOURS	1.07 BILLION
	VIEWING ANGLE	MINIMUM 160 DEGREES (HORIZONTAL AND VERTICAL)
	<b>RGB INPUT</b>	RGB INPUT 1
	RGB INPUT 2	BNC CONNECTOR X 1 SET
<b>CONTROL</b>	RS-232C	Dsub 9PIN(2 ROW TYPE)
<b>DIMENSIONS</b>	1,212(W) X 726(H) x 98(D) mm	
<b>WEIGHT</b>	45.0KGS	
<b>OPERATING CONDITIONS</b>	TEMPERATURE	0°C -40°C
	RELATIVE HUMIDITY	20% - 80%(NOT CONDENSING)
<b>REGULATIONS</b>	U-TYPE	SAFETY: UL6500, (C-UL)
	EMC: FCC PART15 CLASS A, ICES-003 CLASS A	
	W/E/A-TYPE	SAFETY: IE60065, EN60065
	EMC: FCC PART15 CLASS A, ICES-003 CLASS A, CISPR22 CLASS A, AS/NZS 3548 CLASS A, EN55022 CLASS A, EN61000-3-2, IN61000-3-3, EN55024	
	BEZEL COLOUR	GREY

## audio input/output

		<b>P50XCA11</b>
<b>AUDIO INPUT</b>		RCA-PIN X 3 SETS (L/R)
<b>AUDIO OUTPUT</b>	EXTERNAL SPEAKER TERMINAL	(12W+ 12W, 6Ω)
	INTERNAL SPEAKERS	-

## video input/output

<b>P50XCA WITH OPTIONAL VIDEOBOARD P-TE1020</b>		
<b>VIDEO INPUT*</b>	BNC CONNECTOR X 1 SET	
<b>S-VIDEO INPUT*</b>	S-TERMINAL X 1 SET	
<b>COLOUR SYSTEM</b>	3.58NTSC, 4.43NTSC, PAL, PAL60, SECAM	

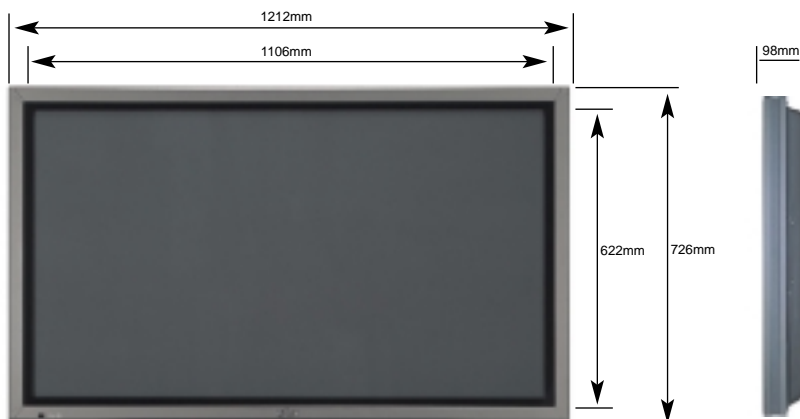

## options

DESKTOP STAND(H COLOUR)	P-TT4200-H
WALL MOUNTING BRACKET	P-WB4200-B
CEILING MOUNT BRACKET	P-CT4200-B
SPEAKER	P-50SP01-H
SPEAKER STAND	P-50ST01-H
VIDEOBOARD	P-TE1020

### \*ALSO AVAILABLE

DESKTOP STAND(H COLOUR)	P-50TT01-H
WALL MOUNTING BRACKET	P-50WB01-B
CEILING MOUNT BRACKET	P-50CT01-B

- ATTENTION : DO NOT DISPLAY THE SAME PICTURE (PATTERN) FOR A LONG PERIOD OF TIME. THIS MAY CAUSE AFTER-IMAGES.
- THE PLASMA PANEL HAS BEEN BUILT USING EXTREMELY PRECISE AND SOPHISTICATED TECHNOLOGY; MORE THAN 99.99% OF ITS PIXELS ARE EFFECTIVE. HOWEVER, A MINUTE NUMBER OF PIXELS ARE MISSING OR CONSTANTLY LIT.
- PLASMAVISION™ IS A WORLDWIDE TRADEMARK OF FUJITSU GENERAL LIMITED AND IS A REGISTERED TRADEMARK IN JAPAN, USA AND OTHER COUNTRIES OR AREAS.
- SPECIFICATIONS AND DESIGN ARE SUBJECT TO CHANGE WITHOUT ANY NOTICE FOR FURTHER IMPROVEMENT.

\*PLEASE NOTE: THE P50XCA30 IS NOT EQUIPPED WITH VIDEO CONNECTORS. VIDEO CONNECTORS AND FUNCTIONALITY ARE ONLY AVAILABLE IF THE OPTIONAL VIDEOBOARD P-TE1020 IS ORDERED AND FITTED.

*For a world without limits.*